


OPTICAL FIBER COLD CONNECTOR

Instruction manual

- Thank you very much for buying and using this product.
- In order to use this product correctly, please read this manual before use.
- After reading, please be sure to keep this manual in the user's ready access to the place.

Product Contents





Precautions

1. Select this product according to the specifications of the optical fiber.
2. If any problem occurs due to failure to install according to the Instructions, the user shall be responsible for it.
3. Waste fiber can cause harm to human body, should be properly disposed of.
4. Configure the tool by users. This item is not involved in the product content.



2. Strip off the cable coating using a regular length tool.

Tool

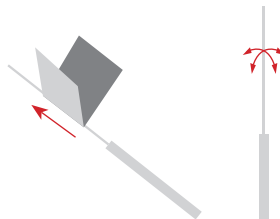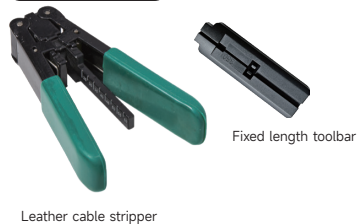


3. Dip dust-free paper into alcohol to clean the optical fiber. Then bend the optical fiber in four directions to check whether it is damaged.

Procedure




1. Insert the optical cable into the stripper, align the ruler, and peel off the cable.

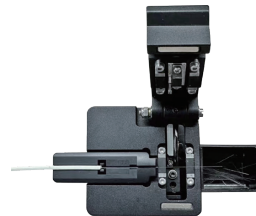


4. Clamp the cable into the positioning slot at the back of the fixed length toolbar, and cut the optical fiber at a fixed length.



5. Take off the optical fiber and insert it through one side of the product until it reaches the limit.

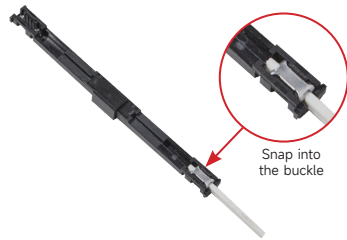


6. Align the buckle with the positioning hole and fix the cable.

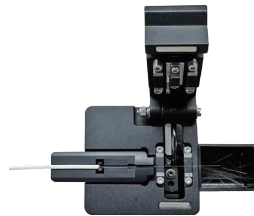


7. Repeat steps 1 to 4 to make the other end of the cable.



8. Take off the optical fiber and insert it through one side of the product until it reaches the limit.

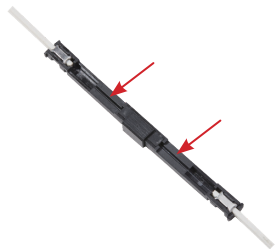

9. Check whether the optical fibers on both sides are slightly bent. If no, re-fabricate the optical fibers.

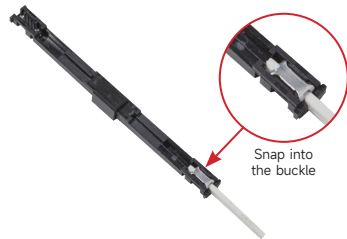

10. Align the buckle with the positioning hole and fix the cable.



11. Press down the cover to fix the optical fiber.



12. Close the top cover and complete the assembly.