

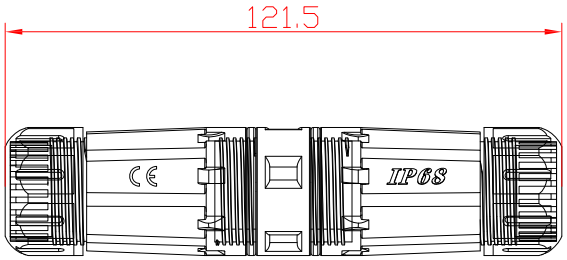









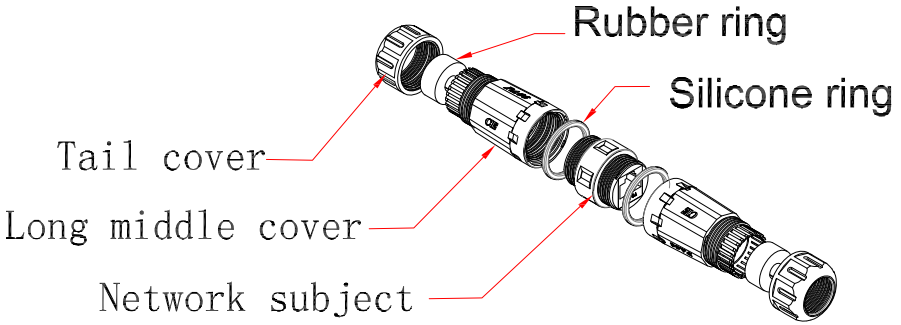

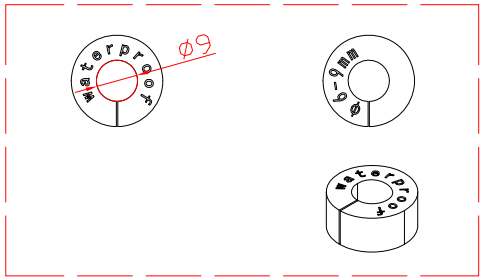

Ø6-9mm

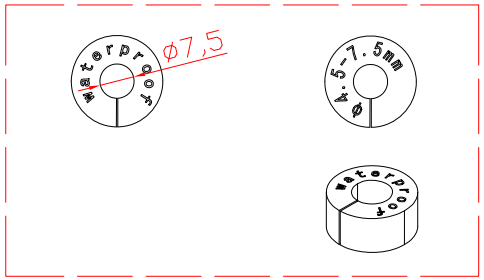

Ø 4.5-7.5mm

NOTES:

ELECTRICAL:

1. VOLTAGE RATING:125 VAC RMS
2. CURRENT RATING:1.5AMP
3. CONTACT RESISTANCE:100MILLIOHMS MAX
4. INSULATION RESISTANCE:1000 MEGOHMS MIN @500 VDC
5. DIELECTRIC STRENGTH:750 VAC RMS 60Hz,1MIN

ENVIRONMENTAL:

1. STORAGE:-40° TO +85°
2. OPERATION:0° TO 70°

MECHANICAL:

1. HOUSING MATERIAL:PA66
2. INSERT MATERIAL:FAME RETARDANCY PBT
3. PCB MATERIAL:FR-4 T=1.6mm
4. RJ45 JACK CONTACT: PHOSPHOR BRONZE WITH NICKEL PATING GOLD PLATED (3U/6U/15U/30U/50U)
5. RJ45 JACK LIFE:750 TIMES MIN
6. Waterproof grade:IP68

SYM	Number	Bill No.of Alteration	Signature	Date
Drawn	Kevin	2019.3.5	Tolerance	
			0.00-20.00 ±0.10 20.00-50.00 ±0.15 50.00-100.00 ±0.20 100.00- ±0.25 Angle ±30°	
Approved	Wang wei jun	2019.3.5		

Material	PA66		Item No.	PL150
Angles Projection	Size	Scale / Unit	Part Name	waterproof RJ45 in-line coupler, Cat6A shielded type
	A4	X:1 / mm	ERP Part No.	
Sheet	1 OF 1	Version: A/0		