

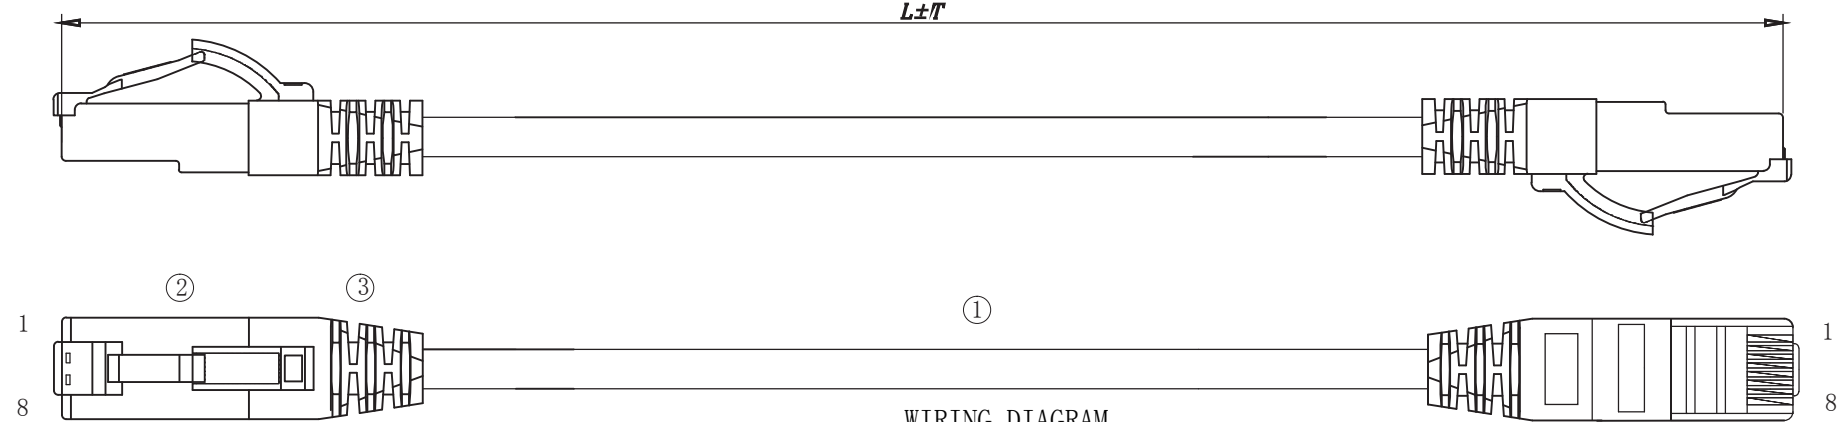


L±T

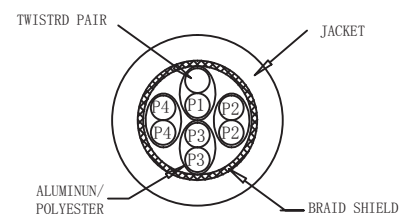

WIRING DIAGRAM



Remarks:
 1. 100% open circuit short circuit&displacement test
 2. Fluke channel link test(100%pass the test)
 L≤5m: link 50m+L+L
 5<L≤15m:link 50m+0.5m+L
 15<L≤30m:Fluek channel test
 TEST LIMIT:ISO11801 Channel Class E
 Working temperature:-10℃ ~ + 60℃
 4. ROHS2.0 AND REACH COMPLIANT

Material list:

③	Jacket	LSZH		
②	PLUG	POLY CARBONATE RJ45 8P8C PIN FU.Nickel plated iron shell	2PCS	
①	WIRE	S/FTP CAT.6A 26AWG Patch cord LSZH/90A	1PCS	
NO.	Material name	Specifications	QTY	REMARK

				Customer name		Customer Part NO	
				Product name		CAT.6A S/FTP PATCH CORD 26AWG	
		New edition		2023-08-30	A	Darwing	Audit
Darwing		Audit		Amendment record		Approve	Date